


Ultimo Factory Reset

AQUA
Conserve
ET-16/66u

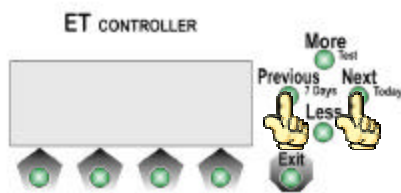

Resetting the Controller:

Important: The factory reset will clear all programming and settings.

Disconnect the battery from the controller.
Disconnect the AC power from the controller.

Simultaneously press the **Previous** and **Next** keys.
While pressing the key apply power to the unit.

The display will show
Factory Reset


and then

Factory Reset
History Reset

The unit is now reset.

Important: After a factory reset you must set the number of stations for your controller. Failure to do so will limit your controller to 16 stations.

AQUA
Conserve
ET-16/66u

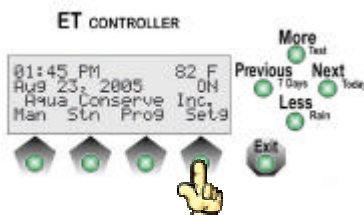

Setting the number of stations:

Important: Do not set the number of station to more than the controller has, you can not use more stations than the controller physically has installed.

From the *Main* screen press the key under the *Setg* menu.

From the first *Setting* screen press the key under the *Setg* menu.

On the second *Setting* screen the '16' in the # of Stations: line will be flashing. If not press the **More** key repeatedly until the '16' is flashing.

Use the **More** or **Less** keys to select the number of stations.


ET-16u = 16 Stations, ET-26u = 26 Stations

ET-36u = 36 Stations, ET-46u = 46 Stations

ET-56u = 56 Stations, ET-66u = 66 Stations

Press the **Next** key to save, and then the **Exit** key to return to the *Main* screen.

AQUA
Conserve
ET-16/66u

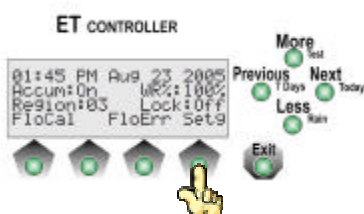

AQUA
Conserve
ET-16/66u

